

DuPont™ Delrin® 100P NC010

ACETAL RESIN

Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® 100P is a high viscosity acetal homopolymer for use in easy-to-fill molds. Delrin® 100P provides a great combination of toughness and strength, improved processing thermal stability and productivity for injection moulding, and low VOC emissions.

General information	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	2.1	cm ³ /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	2.5	g/10min	ISO 1133
Melt mass-flow rate, Temperature	190	°C	ISO 1133
Melt mass-flow rate, Load	2.16	kg	ISO 1133
Moulding shrinkage, parallel	2.2	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.9	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	2850	MPa	ISO 527-1/-2
Yield stress	70	MPa	ISO 527-1/-2
Yield strain	25	%	ISO 527-1/-2
Nominal strain at break	45	%	ISO 527-1/-2
Flexural Modulus	2850	MPa	ISO 178
Flexural Stress at 3.5%	77	MPa	ISO 178
Poisson's ratio	0.37	-	ISO 527-1/-2
Tensile creep modulus			ISO 899-1
1h	2700	MPa	
1000h	1500	MPa	
Charpy impact strength			ISO 179/1eU
23°C	N	kJ/m ²	
-30°C	400	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
23°C	15	kJ/m ²	
-30°C	14	kJ/m ²	
Izod notched impact strength			ISO 180/1A
23°C	14	kJ/m ²	
-40°C	12	kJ/m ²	
Ball indentation hardness, H 358/30	173	MPa	ISO 2039-1
Hardness, Rockwell, M-scale	88	-	ISO 2039-2
Hardness, Rockwell, R-scale	119	-	ISO 2039-2
Thermal properties	Value	Unit	Test Standard
Melting temperature, 10° C/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
1.8 MPa	95	°C	
0.45 MPa	155	°C	
1.8 MPa, annealed	110	°C	
Vicat softening temperature			ISO 306
50° C/h, 50N	160	°C	
50° C/h, 10N	175	°C	
Coeff. of linear therm. expansion, parallel	110	E-6/K	ISO 11359-1/-2

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Delrin® 100P NC010

ACETAL RESIN

Coeff. of linear therm. expansion			ISO 11359-1/-2
normal	110	E-6/K	
Normal, -40-23°C	100	E-6/K	
Parallel, -40-23°C	100	E-6/K	
Thermal conductivity of melt	0.22	W/(m K)	-
Spec. heat capacity of melt	3000	J/(kg K)	-
RTI, electrical			UL 746B
0.75mm	50	°C	
1.5mm	110	°C	
3mm	110	°C	
RTI, impact			UL 746B
0.75mm	50	°C	
1.5mm	85	°C	
3mm	90	°C	
RTI, strength			UL 746B
0.75mm	50	°C	
1.5mm	90	°C	
3mm	95	°C	
Flammability	Value	Unit	Test Standard
Burning Behav. at 1.5mm nom. thckn.	HB	class	IEC 60695-11-10
Thickness tested	1.5	mm	IEC 60695-11-10
UL recognition	UL	-	UL 94
Burning Behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	0.8	mm	IEC 60695-11-10
UL recognition	UL	-	UL 94
Glow Wire Flammability Index			IEC 60695-2-12
1mm	550	°C	
2mm	550	°C	
3mm	550	°C	
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	50	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	Value	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	3.9	-	
1MHz	3.9	-	
Dissipation factor			IEC 62631-2-1
100Hz	35	E-4	
1MHz	55	E-4	
Volume resistivity	1E12	Ohm*m	IEC 62631-3-1
Surface resistivity	2E13	Ohm	IEC 62631-3-2
Electric strength	41	kV/mm	IEC 60243-1
Comparative tracking index	600	-	IEC 60112
Other properties	Value	Unit	Test Standard
Humidity absorption, 2mm	0.3	%	Sim. to ISO 62
Water absorption, 2mm	1.4	%	Sim. to ISO 62
Density	1420	kg/m ³	ISO 1183
Density of melt	1190	kg/m ³	-
VDA Properties	Value	Unit	Test Standard
Emissions	<8	mg/kg	VDA 275
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-

Revised: 2018-03-27

Page: 2 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Delrin® 100P NC010

ACETAL RESIN

Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mould temperature	80	°C	-
Max. mould temperature	100	°C	-
Hold pressure range	90 - 110	MPa	-
Hold pressure time	8	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-

Extrusion	Value	Unit	Test Standard
Drying Temperature	75 - 85	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	200	°C	-
Melt Temperature Range	195 - 205	°C	-

Characteristics			
Processing	<ul style="list-style-type: none">• Injection Moulding• Profile Extrusion	<ul style="list-style-type: none">• Sheet Extrusion• Other Extrusion	
Delivery form	<ul style="list-style-type: none">• Pellets		
Additives	<ul style="list-style-type: none">• Lubricants	<ul style="list-style-type: none">• Release agent	
Regional Availability	<ul style="list-style-type: none">• North America• Europe	<ul style="list-style-type: none">• Asia Pacific• South and Central America	<ul style="list-style-type: none">• Near East/Africa• Global

Processing Texts

Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:

- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




DuPont™ Delrin® 100P NC010


ACETAL RESIN

Diagrams

Viscosity-shear rate

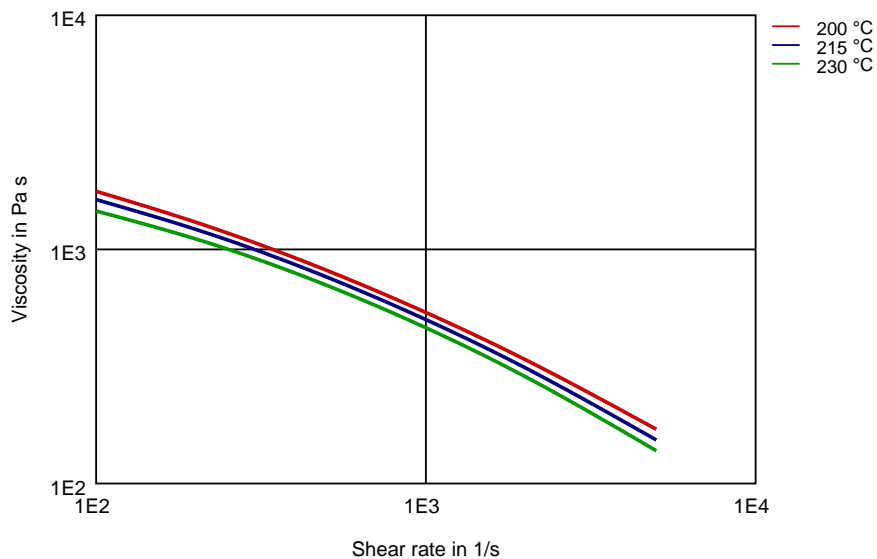


Shearstress-shear rate

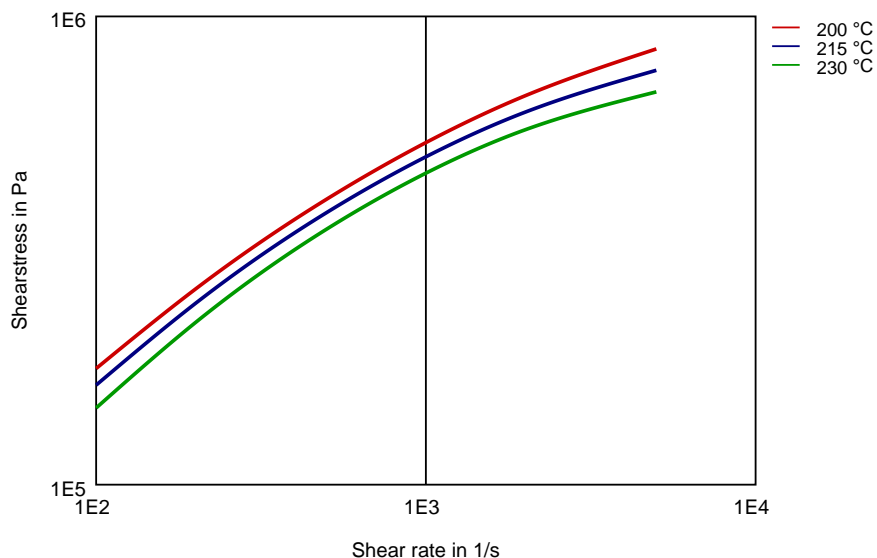

DuPont™ Delrin® 100P NC010

ACETAL RESIN

Dynamic Shear modulus-temperature

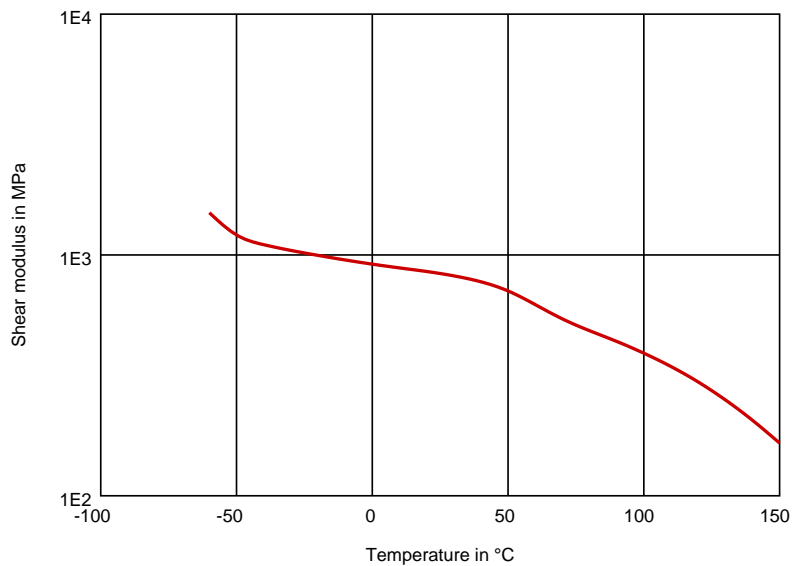

Revised: 2018-03-27

Page: 5 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Delrin® 100P NC010

ACETAL RESIN

Stress-strain

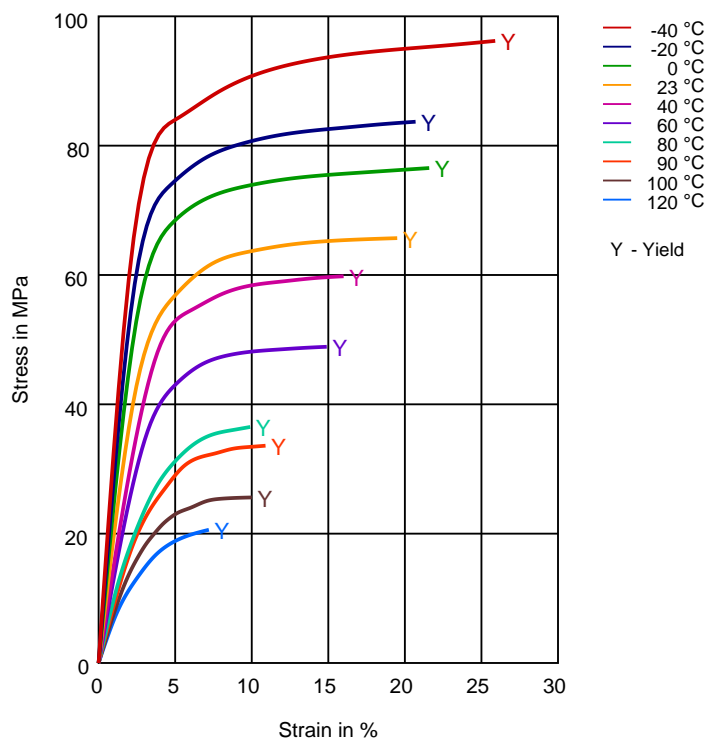

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Delrin® 100P NC010

ACETAL RESIN

Secant modulus-strain

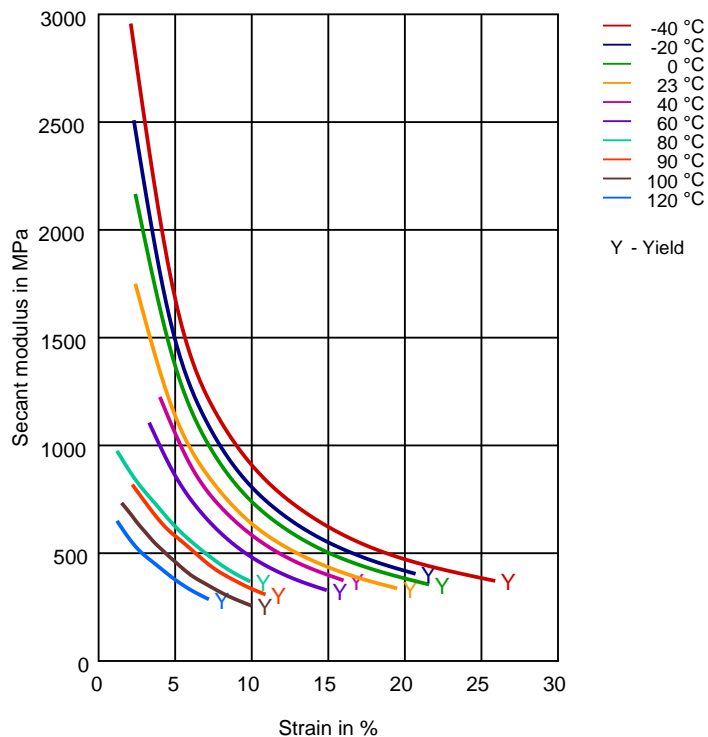

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11




DuPont™ Delrin® 100P NC010

ACETAL RESIN

Specific volume-temperature (pvT)

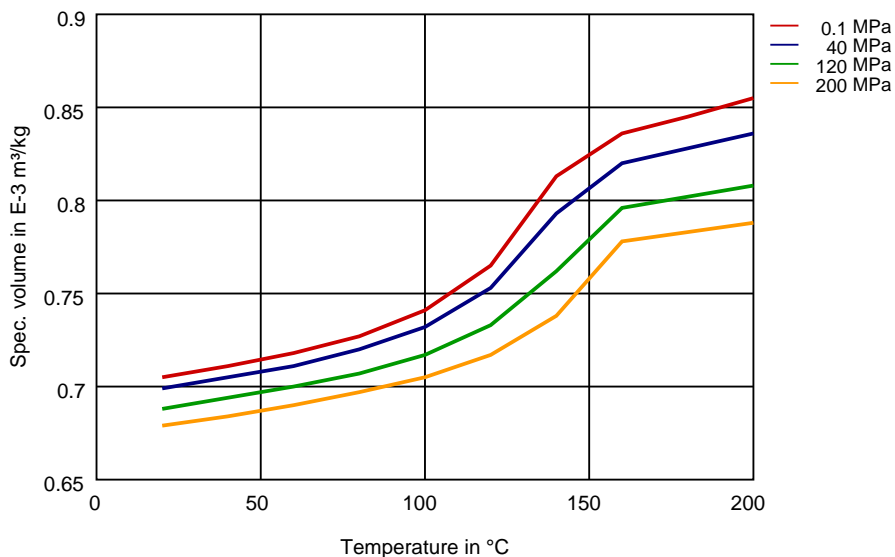

Tensile modulus-temperature

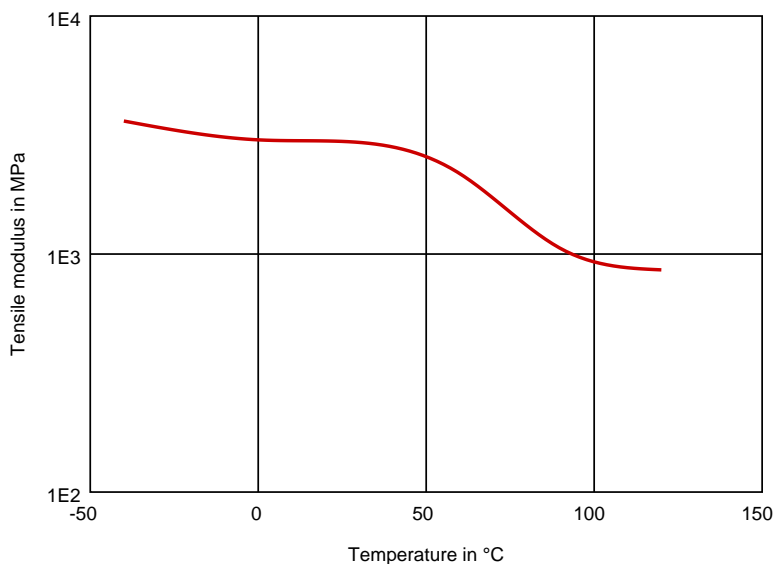

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Delrin® 100P NC010

ACETAL RESIN

Tensile Fatigue, 10Hz, R=0.1 mm

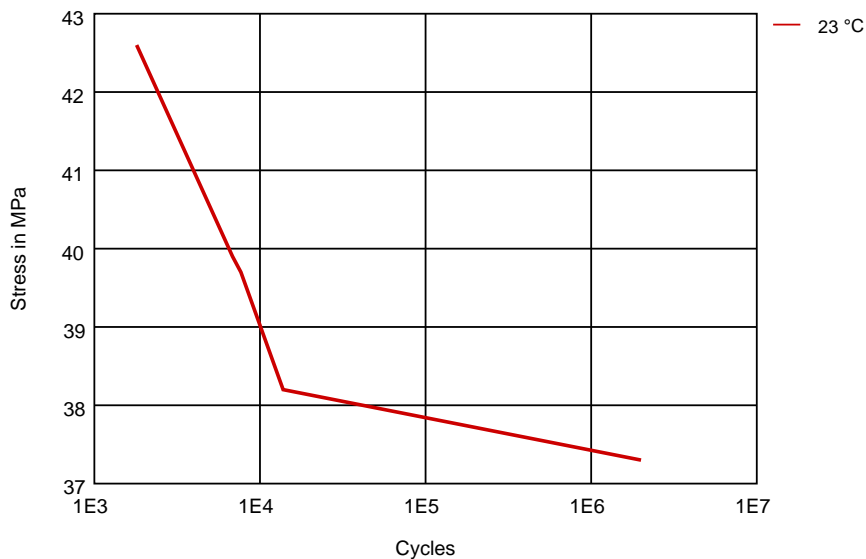

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Delrin® 100P NC010

ACETAL RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✗ Citric Acid solution (10% by mass) (23 °C)
- ✗ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✗ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✗ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✗ SAE 10W40 multigrade motor oil (130 °C)
- ✗ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)

Revised: 2018-03-27

Page: 10 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Delrin® 100P NC010

ACETAL RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✗ Sodium Carbonate solution (20% by mass) (23°C)
- ✗ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4mm (Hytrel® measured at 2 mm), IEC Electrical properties measured at 2mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

Revised: 2018-03-27

Page: 11 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.