

PCP-2704EL

Polycarbonate compound resin

General information

Description

High flowability, high impact strength, easy mold release
Non-brominated, non-chlorinated flame retardant
Available in opaque color only

Applications

Multi purpose grade (electric/electronic housings, etc.)

Typical properties¹

	Test method	Typical value	Unit	
Physical				
Melt Flow Index, 300°C, 1.2 kg	ASTM D1238	-	g/10 min	
Specific Gravity	ASTM D792	1.20		
Mold Shrinkage	ASTM D955	0.5~0.7	%	
Mechanical				
Tensile Strength, yield, 50 mm/min	ASTM D638	600	kg _f /cm ²	
Tensile Elongation, break, 50 mm/min	ASTM D638	> 100	%	
Flexural Strength, yield, 10 mm/min	ASTM D790	920	kg _f /cm ²	
Flexural Modulus, 10 mm/min	ASTM D790	26,000	kg _f /cm ²	
IZOD Impact Strength, notched, 23°C, 1/8"	ASTM D256	80	kg _f ·cm/cm	
	notched, 23°C, 1/4"	ASTM D256	-	kg _f ·cm/cm
	notched, -30°C, 1/8"	ASTM D256	-	kg _f ·cm/cm
Thermal				
Heat Distortion Temp.	4.6 kg _f /cm ²	ASTM D648	-	°C
	18.6 kg _f /cm ²	ASTM D648	95	°C
Vicat Softening Temp.	Rate B/50	ASTM D1525	-	°C
Flammability				
UL94 V-0	UL94	0.8	mm	
UL94 V-0	UL94	3.0	mm	

Notes

ISO 9001, 14001, TS 16949


¹ Typical properties : these are not to be construed as specifications.

PCP-2704EL

Polycarbonate compound resin

Processing guides¹

	Typical value	Unit
Drying condition		
Drying temperature	90	°C
Drying time	4	hr
Maximum moisture content	0.02	%
Injection molding		
Melt temperature	280 ~ 300	°C
Nozzle temperature	270 ~ 290	°C
Barrel	Rear zone	280 ~ 300
	Middle zone	270 ~ 290
	Front zone	260 ~ 280
Hopper temperature	60 ~ 80	°C
Mold temperature	60 ~ 90	°C

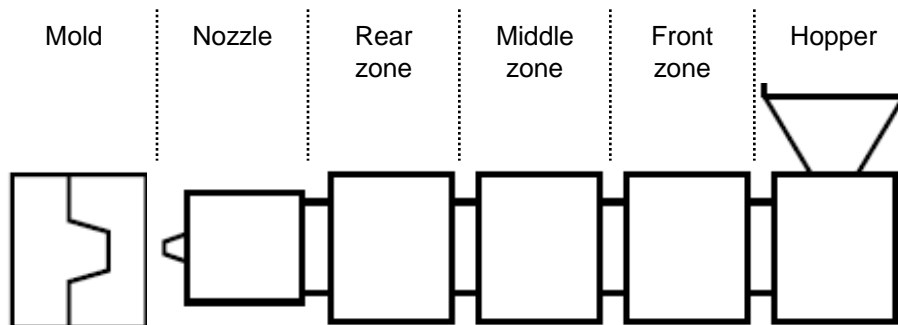

Recycling

Sprues and runners can be reground with virgin resin within the ratio of 20%. Care must be taken to ensure that the regrind is free from impurities and regrind should not be used in applications where impact performance and/or agency compliance are required.

Notes

ISO 9001, 14001, TS 16949

¹ Processing guides : Typical processing parameters are noted. Actual processing conditions will depend on machine size, mold design, material residence time, shot size, etc.